


Vandal resistant IP call station designed for safety

Akuvox E21A is outdoor-rated, SIP-compliant hands-free Voice over IP (VoIP) emergency station for use in locations such as: parking facilities, college campuses, medical centers, and industrial parks.

At a Glance

- Vandal resistant body, with a panic button;
- PoE (IEEE802.3af, Power-over-Ethernet);
- Two-way audio communication over IP networks with Echo Cancel feature;
- Complies with SIP standard for easy integration in every SIP capable PBXes;

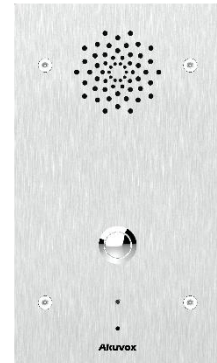

Physical & Power

- Front panel: 316 grade stainless steel
- Button: 1 panic button
- Reset: 1 reset button (on board)
- Relays out: 2
- Inputs: 2
- Microphone: -40dB
- Speaker: 8Ω / 1.5W
- Ethernet port: RJ45, 10/100Mbps adaptive
- 802.3af Power-over-Ethernet
- 12 ~ 48V DC input (if not using PoE)
- Water-proof & Dust-proof: IP65
- Installation: Flush-mounted
- Flush-mounted DIM: 210x120x61mm
- Working Humidity: 10~90%
- Working Temperature: -20°C ~ +55°C
- Storage Temperature: -40°C ~ +70°C

Audio

- SIP v1 (RFC2543), SIP v2 (RFC3261)
- Narrowband audio codec: G.711a, G.711 μ , G.729
- Broadband audio codec: G.722
- DTMF: In-band, out-of-band DTMF (RFC2833),

SIP Info

- Echo Cancellation
- Voice Activation Detection
- Comfort Noise Generator

Door Entry Feature

- Relays controlled individually by DTMF tones

Networking & Protocol

- Protocols support: IPv4, HTTP, HTTPS, FTP, SNMP, DNS, NTP, TCP, UDP, ICMP, DHCP, ARP

Deployment

- Auto-Provisioning
- Web management portal
- Web-based packet dump
- Configuration backup / restore
- Entry log export
- Access table export / import
- Firmware upgrade
- System logs (include door access logs)

Target Groups

- Education: universities, campuses, schools
- Logistics & Transportation: airports, parking lots
- Healthcare: hospitals, laboratories