

## RADWIN 2000 C-Series



### RW-2250-0100

#### RW-2250-0100

RW-2250-0100 is a carrier-class radio supporting the 5.3 GHz, 5.4 GHz and 5.8 GHz bands and complying with ETSI regulations (factory default: 5.4 GHz ETSI). The multi-band radio is part of the RADWIN 2000 C-Series that delivers highest capacity and extended range for carriers' backhaul needs

Packing native TDM and Ethernet over a single wireless link, the RADWIN 2000 C-Series provides 200 Mbps net aggregate throughput (up to 16XE1/T1 plus Ethernet) at a range of up to 120 km/75 miles.

RADWIN RW-2250-0100 comes with an integrated antenna.

#### Product Highlights

- 200 Mbps Ethernet net throughput and up to 16E1s/T1s
- Native TDM transport
- GBE support
- Long range – up to 120 km/75 miles
- Adaptive asymmetric throughput – dynamic allocation between uplink and downlink
- Single radio supporting multiple bands (5.x GHz)
- Advanced MIMO, OFDM and Diversity technologies
- Robust and reliable to operate in tough conditions, extreme temperatures and non line-of-sight scenarios

## Product Specifications

Configuration	
Architecture	Outdoor Unit with Integrated Antenna
IDU to ODU Interface	Outdoor CAT-5e cable; Maximum cable length: 100m @100BaseT and 70m @1000BaseT
Radio	
Capacity	200 Mbps net aggregate throughput (up to 16E1s/T1s plus Ethernet)
Range	Up to 120 km / 75 miles
Channel Bandwidth	Configurable: 10,20 or 40 MHz
Modulation	2x2 MIMO-OFDM (BPSK/QPSK/16QAM/64QAM)
Adaptive Modulation & Coding	Supported
Automatic Channel Selection	Supported
Diversity	Supported
Spectrum View	Supported
Max Tx Power	5.8 GHz: 9dBm / total 36 dBm EIRP 5.4 GHz: 3.5 dBm / total 30 dBm EIRP 5.3 GHz: -3.5 dBm / total 23 dBm EIRP
Duplex Technology	TDD
Error Correction	FEC k = 1/2, 2/3, 3/4, 5/6
Encryption	AES 128
Ethernet Interface	10/100/1000BaseT
Supported Indoor Units	IDU-C Series (RW-72XX-2000), IDU-E Series (RW-71XX-1000) RADWIN PoE device (RW-9921-001X)
QoS	Packet classification to 4 queues according to 802.1p and Diffserv, Dynamic scheduling according to air interface changes
VLAN	Supported
Ethernet Ring Protection	Supported, including Ethernet 1+1
Hub Site Synchronization (HSS)	Up to 16 collocated links (RADWIN 2000 and/or WinLink 1000)
Monitored Hot Standby (MHS)	1+1 with RADWIN 2000 link or WinLink 1000 link

Supported Bands		
Band	Occupied Frequency Range	Radio Compliance
5.8 GHz ETSI	5.735 – 5.865	ETSI EN 302 502
<b>5.4 GHz ETSI*</b>	<b>5.480 – 5.715</b>	<b>ETSI EN 301 893</b>
5.3 GHz ETSI	5.160 – 5.340	ETSI EN 301 893


### \* Factory Default

Mechanical	
Dimensions	37.1(w) x 37.1(h) x 11.0(d) cm
Weight	3.5 kg / 7 lbs
Power	
Power Feeding	Power provided over ODU-IDU cable
Power Consumption	<35W (IDU + ODU)
Environmental	
Operating Temperatures	-35°C - 60°C / -31°F – 140°F
Humidity	100% condensing, IP67 (totally protected against dust and against immersion up to 1m)
Safety	
FCC/IC (cTUVus)	UL 60950-1, UL 60950-22, CAN/CSA C22.2 60950-1, CAN/CSA C22.2 60950-22
ETSI	EN/IEC 60950-1, EN/IEC 60950-22
EMC	
FCC	CFR47 Class B, Part15, Subpart B
ETSI	EN 300 386, EN 301 489-1, EN 301 489-4
CAN/CSA-CEI/IEC	CISPR 22-04 Class B
AS/NZS	CISPR 22-2004 Class B


### Integrated Antenna

<b>Minimum Peak Gain</b>	22.5 dBi $\pm$ 0.5 @ 5.15-5.25 GHz
	23 dBi $\pm$ 0.5 @ 5.25-5.875 GHz
<b>VSWR</b>	1.5 : 1 (typ) 1.7 : 1 (max)
<b>3 dB Beamwidth</b>	9° (typ)
<b>AZ &amp; EL Beam Squint</b>	$\pm$ 2° Port V & Port H
<b>Polarization</b>	Dual Linear (Vertical and Horizontal)
<b>Sidelobes Level</b>	ETSI EN 302 085 V1.1.2, TS1-TS3
<b>Cross Polarization</b>	ETSI EN 302 085 V1.1.2, TS1-TS3
<b>F/B Ratio</b>	35 dB (max)
<b>Port To Port Isolation</b>	40 dB (min)
<b>Lightning Protection</b>	DC grounded

Elevation @ 5.8GHz

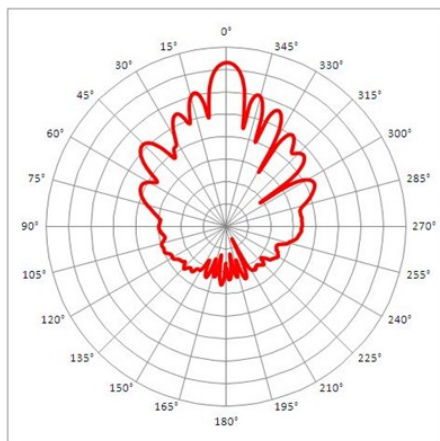

Azimuth @ 5.8GHz

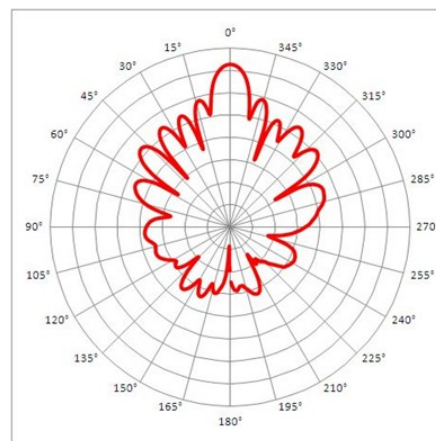

## Ordering Information

**Part Number:** RW-2250-0100

**Description:**

RADWIN 2000 C-Series ODU with integrated antenna, supporting multi frequency bands at 5.x GHz,

Factory default 5.4 GHz ETSI

**Corporate Headquarters,** T. +972.3.766.2900, E. sales@radwin.com, www.radwin.com

The RADWIN name is a registered trademark of RADWIN Ltd.

© All rights reserved, July 2011

DS RW-2250-0100/07.11