



The SONABeam Z series was designed to provide a lightweight, economical solution for short distance links. It is ideal for high capacity links up to 500 meters. The SONABeam Z is housed in a low-profile, all aluminum enclosure suitable for outdoor operation in all weather environments as well as for indoor installation operating through a window. Featuring near-zero latency and packet loss, the SONABeam Z transmits full-rate, full-duplex native Gigabit Ethernet and can also operate in protocol transparent mode in order to support custom datarates or carry both TDM and IP traffic on the same link.

THE SONABEAM ADVANTAGE

By transmitting through the atmosphere, the SONABeam eliminates the substantial costs of digging up streets and sidewalks required to install fiber, and unlike other wireless solutions, the SONABeam is immune to electromagnetic (EM) and radio-frequency (RF) interference which means no licensing is required. Plus, the SONABeam's narrow, highly directional transmission all but eliminates eavesdropping or interception. Key to SONABeam's breakthrough laser technology is its operational wavelength of 1550 nm, which provides a broad spectrum of safety and performance advantages. The SONABeam's high-powered laser transmitters are able to penetrate heavy rain, snow and fog far more effectively and consistently than any other available FSO technology. SONABeam's protocol transparent technology gives service provider, enterprise and government customers the ability to integrate free space optics (FSO) quickly and easily into any existing network.

TYPICAL APPLICATIONS

Mobile Wireless




3G/4G/LTE Backhaul
Backhaul Redundancy
Remote Antenna Extension

Enterprise, Government, Military

High-bandwidth campus
Fiber-line replacement
Secure links

Service Provider

High-speed backbone
RF/Wi-Fi-WiMax aggregation
Private lines

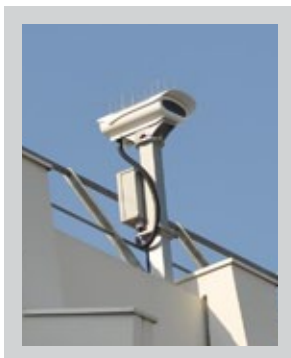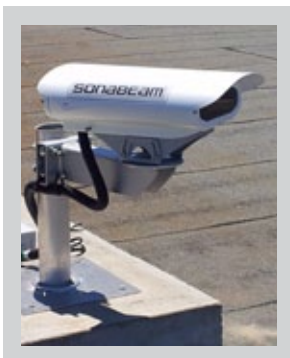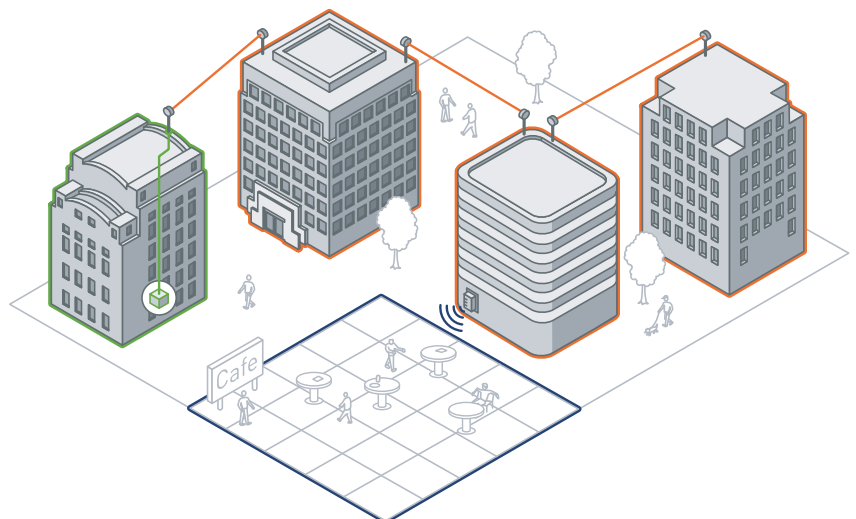

RAPID DEPLOYMENT • HIGH CAPACITY • NON INTERFERING • UNLICENSED • 1550 NM TRANSMISSION
FULL-RATE, FULL-DUPLEX • SECURE & UNDETECTABLE • LOW LATENCY/PACKET LOSS

Free-Space Optical	1250-Z ¹	2500-Z ²
<i>Datarate/protocol:</i>	Fast Ethernet: 125 Mbps, full duplex; OC-3/STM-1: 155 Mbps, full duplex Gigabit Ethernet: 1.25 Gbps, full duplex; OC-12/STM-4: 622 Mbps, full duplex	OC48/STM16, 2.5 Gbps, full duplex Gigabit Ethernet: 1.25 Gbps, full duplex
<i>Range: 3 dB/km (clear air):</i>	50 m to 500 m (160 ft to 0.3 mi)	50 m to 500 m (160 ft to 0.3 mi)
<i>10 dB/km (extreme rain):</i>	50 m to 350 m (160 ft to 0.2 mi)	50 m to 350 m (160 ft to 0.2 mi)
<i>Laser output power:</i>	160 mW peak	160 mW peak
<i>Receive aperture:</i>	50 mm (2 in) diameter	50 mm (2 in) diameter
Interface Options	1000-Base-SX (850 nm)	1000-Base-LX (1310 nm)
<i>Data physical interface:</i>	Multimode fiber, LC	Singlemode fiber, LC
<i>Fiber xmtr/rcvr wavelength:</i>	850 nm nominal	1310 nm nominal
<i>Fiber xmtr output power:</i>	-9 dBm (min), -3 dBm (max)	-11 dBm (min), -3 dBm (max)
<i>Fiber rcvr input power:</i>	0 dBm (min), -17 dBm (max)	-20 dBm (min), -3 dBm (max)
Mechanical / Electrical / Environmental		
<i>Operating temperature:</i>	-40°C to 60°C (-40°F to 140°F)	<i>Dimensions (W*H*D):</i> 25 x 33 x 46 cm; 10 x 13 x 18 in
<i>Pointing stability:</i>	120 kmh/75 mph operating, >160 kmh/100 mph survival	<i>Weight:</i> 10 kg (22 lbs)
<i>Environmental seal:</i>	Water-tight, IP66/NEMA-4 Cert.	<i>Input voltage:</i> -48 VDC (-40 V to -57 V) or 100-240 VAC
		<i>Power consumption:</i> 25 watts (no heater)
Carrier-Class Reliability and Durability		
<i>Laser cooling:</i>	Active solid state cooling to 35°C (95°F)	<i>Power supply:</i> Telco grade, >550,000 hour
<i>Structure:</i>	Aluminum housing	
Element Management and Control		
<i>Management interface:</i>	USB, Serial & 10/100-baseT	<i>GUI control program:</i> SONAbeam Terminal Controller
<i>SNMP:</i>	Embedded v.1 agent	<i>Command line interface:</i> Via USB, RS232 or IP address
<i>Key parameters monitored:</i>	Receive signal strength; Power supply currents & voltages; Laser currents, power levels & temperatures; Internal temperature; Clock recovery / sync status; Network interface signal status	
<i>Historical logging:</i>	Internal data and event logging	
Certifications & Classifications	International	US/Canada
<i>Laser safety</i>	IEC 60825-1, Class 1M EN 55022 - emissions	CDRH 21 CFR including Laser Notice 50, Class 1M; ANSI Z136.1 & Z136.6, Class 1
<i>EMC</i>	EN 55024 - immunity	FCC - Pat 15 / ICES - 003
<i>Electrical</i>	EN 60950 (CB scheme)	UL 60950 / CSA 60950