

HiveAP 330

802.11n access point

AEROHIVE NETWORKS HiveAP 330 series access point (AP) is a high performing and highly reliable 802.11n access point. The Hive AP 330 provides high performance dual concurrent (2.4GHz and 5GHz) 802.11n 3x3 with three spatial stream MIMO (450 Mbps per radio) as well as dual 10/100/1000 Ethernet port service.

The HiveAP 330 is an enterprise-grade, (3x3) MIMO solution, designed for high bandwidth demand wireless enterprise environments. With multiple radios and the ability to provide service concurrently on both 2.4Ghz and 5Ghz bands, the HiveAP 330 can provide up to an aggregate data rate of 450 Mbps. The HiveAP 330 provides both mesh and support for legacy 802.11a, b, and g clients, through Aerohive's industry unique and resilient controller-less architecture.



The **Aerohive HiveAP 330** is an enterprise-grade, two radio (3x3) three stream MIMO 802.11n solution, capable of 450Mbps datarates.

Software Features

HiveOS

All HiveAPs support the feature-rich HiveOS service architecture. HiveOS is an implementation of Aerohive's Cooperative Control Architecture which enables multiple APs to organize into groups or "hives," that share control information enabling functions such as fast layer-2/ layer-3 roaming, cooperative RF management, security and mesh networking without requiring a dedicated system controller. The resulting feature-rich capability enables a next generation wireless LAN architecture, called a Cooperative Control Wireless LAN Architecture. This architecture provides the benefits of a controller-based implementation, yet has a lower deployment/ownership cost, is more reliable, more scalable, higher performing and more suitable for today's proliferation of wireless applications than controller-based architectures.

For product information on HiveOS, visit aerohive.com/products/software-management/hiveos

Network Management Solutions

Aerohive's HiveManager NMS is a central management solution for Aerohive HiveAPs. HiveManager supports simple policy creation, firmware upgrades, configuration updates, and centralized monitoring throughout the entire Aerohive deployment, whether building-wide, campus-wide, or global - all from a single console. Because the HiveManager is not actively involved in passing traffic or in making forwarding decisions, it eliminates the traffic bottlenecks and complexities of controller-based solutions, particularly in geographically distributed environments. As a result, control is distributed, while management is centralized. Essentially, the HiveManager solution delivers the benefits of both autonomous APs and controller-based solutions, without the drawbacks of either approach.

Aerohive's HiveManager NMS can be delivered two ways:

- HiveManager Online—a cloud-based management service from Aerohive
- HiveManager VMware virtual appliance—an on-premise VM management solution

For more information visit aerohive.com/products/software-management/hivemanager

Warranty and Support

Every Aerohive Networks HiveAP is backed by a limited lifetime hardware warranty. Extended product and technical support may be purchased separately and can include next day advanced replacement, 24x7 or 8x5 technical support, web and email support access, and software updates. For complete support terms go to www.aerohive.com/support.

Contact us today to learn how your organization can benefit from an Aerohive wireless LAN architecture.



Product Specifications

Radio Specifications—802.11a

- 5.150–5.950 GHz Operating Frequency
- Orthogonal Frequency Division Multiplexing (OFDM) Modulation
- Rates (Mbps): 54, 48, 36, 24, 18, 12, 9, 6 w/ auto fallback

Radio Specifications—802.11b

- 2.4–2.5 GHz Operating Frequency
- Orthogonal Frequency Division Multiplexing (OFDM) Modulation
- Rates (Mbps): 54, 48, 36, 24, 18, 12, 9, 6 w/ auto fallback

Radio Specifications—802.11g

- 2.4–2.5 GHz Operating Frequency
- Orthogonal Frequency Division Multiplexing (OFDM) Modulation
- 20 dBm (100 mW) Transmit Power
- Rates (Mbps): 54, 48, 36, 24, 18, 12, 9, 6 w/ auto fallback

Radio Specifications—802.11n

- 2.4–2.5 GHz & 5.150–5.950 GHz Operating Frequency
- 802.11n Modulation
- Rates (Mbps): MCS0–MCS23 (6.5Mbps - 450Mbps)
- 2x3, 3x3 Multiple-In, Multiple-Out (MIMO) Radio
- HT20 (both 2.4GHz and HT40 High-Throughput(HT) Support)
- A-MPDU and A-MSDU Frame Aggregation

Mounting

- Desktop
- Wall Mount bracket included
- Ceiling Tile Clips 11/17" included, 9/16" sold as an accessory

Antennas

- 3x Integrated single band, 2.4-2.5 GHz Omni-directional antennas, 6.0 dBi peak gain
- 3x Integrated single band, 5.1-5.8 GHz Omni-directional antennas, 6.0 dBi peak gain

Interfaces

- 2x autosensing 10/100/1000 Base-T Ethernet Ports
- Link Aggregation supported via Ether channel (link aggregation at 10/100 only)
- 1x Serial RJ45 port (bits per second: 9600, data bits: 8, parity: none, stop bits: 1, flow control: none)
- USB 2.0 port
- 1x Reset Pinhole

Physical

- WxHxD: 7.875 in. x 1.5 in. x 7.875 in. (20 cm x 3.8 cm x 20 cm)
- 2 lbs (0.68 kg)

Environmental

- Operating: 0 to +40°C, Storage: -20 to +70°C
- Humidity: 95%

Power Options

- 802.3af and/or 802.3at Power over Ethernet (PoE) port
- 12v DC external power adapter (sold separately)

Power Specification

- AC/DC power adapter:
 - Input: 100–240 VAC
 - Output: 12 V/0.625 A
- PoE nominal input voltages: 48V, 0.35A, (802.3af) – 48V, 0.625A (802.3at)
- RJ-45 power in put pins: Wires 4,5,7,8 or 1,2,3,6
- 802.3af compliant with Cat-5 cable (14.5W max power draw)

Power & Sensitivity Table

Power shown is per transmit chain and is a maximum power that the radio is capable of, power limits will be limited by local radio regulations.

Rate	2.4GHz		5GHz	
	TX Power	RX Sensitivity	TX Power	RX Sensitivity
802.11b				
1 Mbps	23	-100		
11 Mbps	21	-92		
802.11g/a				
6 Mbps	23	-96	23	-95
54 Mbps	20	-81	20	-80
802.11n HT20				
MCS0	23	-96	23	-95
MCS7	20	-81	20	-80
MCS8	23	-94	22	-93
MCS15	20	-79	19	-78
MCS16	22	-93	21	-92
MCS23	19	-77	18	-73
802.11n HT40				
MCS0	22	-93	22	-92
MCS7	19	-78	18	-77
MCS8	22	-91	21	-90
MCS15	19	-74	18	-75
MCS16	21	-90	21	-89
MCS23	18	-73	18	-70

Features & Benefits





Flexible Hardware Platform

- Multiple radios provide concurrent 802.11a/n and 802.11b/g/n connections with no degradation in performance
- Automatic or dedicated mesh backup
- Dual Ethernet ports for etherchannel or backup connectivity.
- Plenum Rated APs for indoor, office environments
- Supports 802.3af PoE or standard power adapter
- USB interface for future 3G/4G services
- Hardware acceleration for iPsec services

Innovative Design

- Low profile design blends well into an office environment
- Feature optimized hardware design
- Low-distraction indicators appear as gently glowing rather than bright blinking lights

RF Coverage Maps

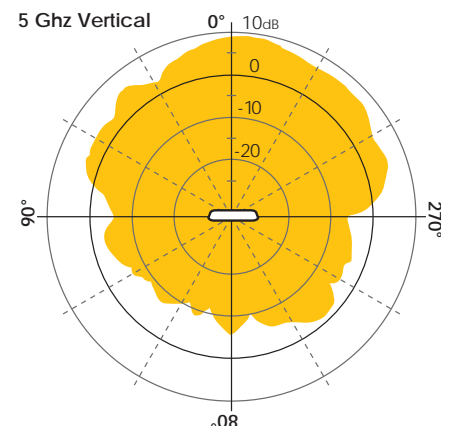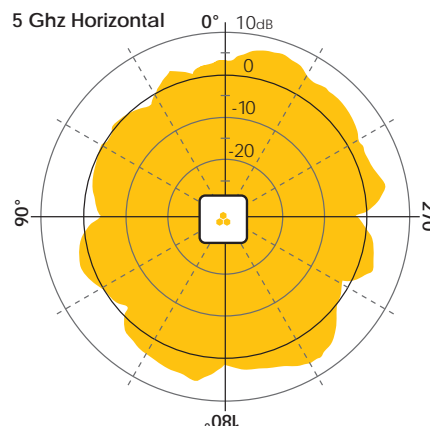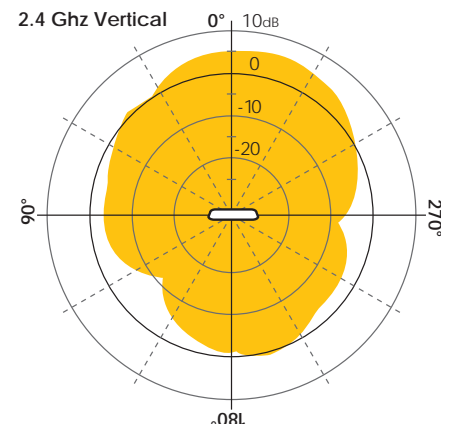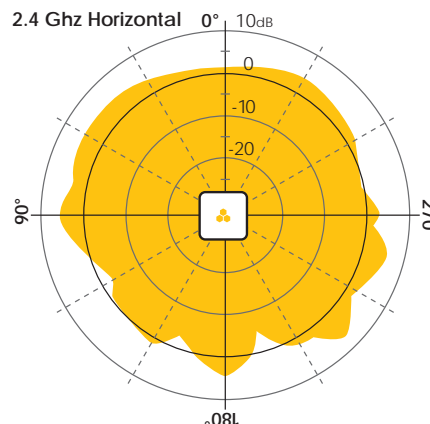

Hardware Assisted Features

Security

- Trusted Platform Module (TPM)–Hardware-based key storage and encryption
- Wireless privacy & authentication Wi-Fi CERTIFIED™ WPA™ and WPA2™, 802.11i, WEP, 802.1x, PSK
- Granular user profile-based management defines QoS, mobility policies, and security policies for each user that enters the network
- Encryption: AES:CCMP, TKIP, and RC4 (WEP only)
- Marking and policing–WMM™ (802.11e) for wireless, 802.1p and/or DiffServ
- Wi-Fi CERTIFIED WMM
- WMM power save (U-APSD)

Anti-Theft

- Designed to work with Kensington-style locks
- Tamper-proof security screw (with bracket option)

SKU	Description
HiveAPs	
AH-AP-330-N-FCC	HiveAP 330, Plenum Rated, one 802.11b/g/n radio, one 802.11a/n radio, two 10/100/1000 Ethernet (PoE), mounting bracket, FCC regulatory domain without power supply
AH-AP-330-N-W	HiveAP 330, Plenum Rated, one 802.11b/g/n radio, one 802.11a/n radio, two 10/100/1000 Ethernet (PoE), mounting bracket, configurable regulatory domain without power supply
AP Accessories	
AH-ACC-PWR-12V-US, -EU, -UK -AU	24W power supply for HiveAP 330 and 350 with US, EU, UK, AU power plug
AH-ACC-SEC-BIT-330-350-3PK	HiveAP 330/350 security screw bit (3pk)
AH-ACC-BKT-330-350	HiveAP 330/350 wall mounting bracket
AH-ACC-9-16-CLIP-330-350	HiveAP 330/350 9/16" ceiling mount brackets for recessed and non-recessed ceiling tiles
AH-ACC-Serial-RJ45	RJ45 to DB9 Serial Console Cable