




## EXSW-1600C Wireless LAN Switch Cascade

The Wi-Fi CERTIFIED™ n EXSW-1600C Wireless LAN Switch Cascade helps scale Extricom’s Channel Blanket architecture by extending the continuous mobility zone to twice its previous size – an area covered by 32 Extricom UltraThin Access Points (APs). The Switch Cascade also provides a fully redundant wireless LAN infrastructure to eliminate a single point of failure and support high-availability scenarios.

The EXSW-1600C is a 16-port switch that can be connected to a legacy Extricom EXSW-1600 switch to form a Switch Cascade system\*. Each component switch in the combined EXSW-1600/EXSW-1600C system is user-configurable as the primary or secondary switch. The EXSW-1600C provides both an uplink and interconnect Gigabit Ethernet port, and sixteen Gigabit Ethernet ports with Power over Ethernet (PoE) to connect any Extricom AP. The EXSW-1600/EXSW-1600C Switch Cascade system can support up to 32 Extricom APs, enabling up to four independent coverage blankets to be configured from the same physical infrastructure. The switches may be positioned several hundred meters apart for deployment flexibility. The EXSW-1600/EXSW-1600C can alternatively be configured in a fully redundant, high availability mode to ensure continuous network access and full performance even if there is an AP or switch failure.

The EXSW-1600C is compatible with all Extricom APs and interoperable with any IEEE 802.11a/b/g/n wireless client.

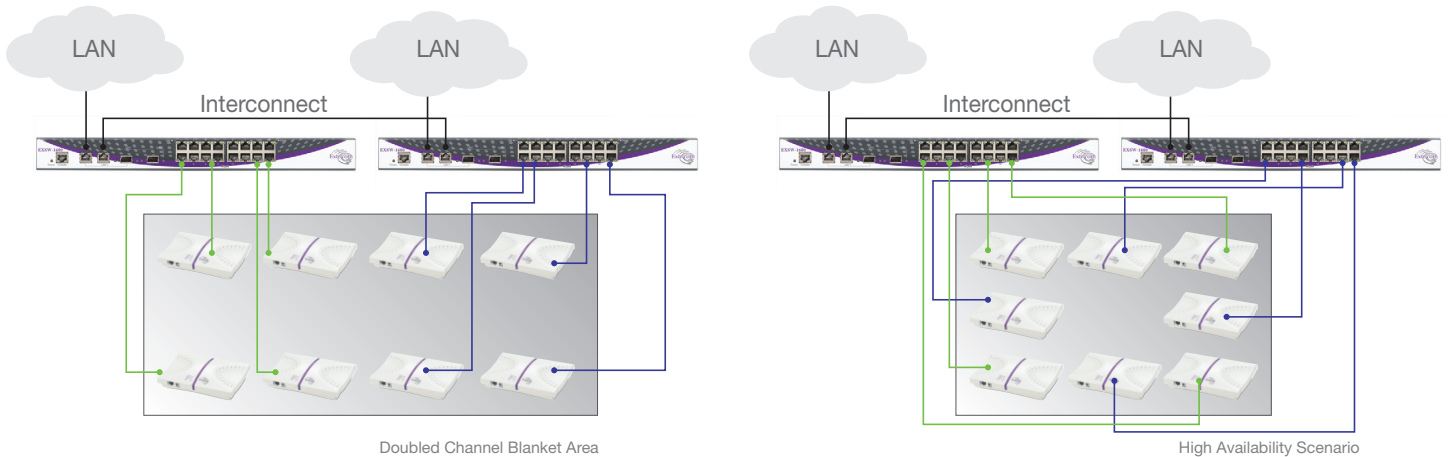

### The Extricom Difference

<b>Continuous Mobility</b>	Client devices move anywhere within a vastly expanded Extricom Channel Blanket without experiencing inter-AP handoffs, re-authentication or latency.
<b>High Availability</b>	Provides complete physical redundancy from a single edge switch solution, ensuring no single point of failure while allowing wireless clients to leverage both component switches.
<b>Scalability</b>	Provides no-handoff wireless coverage for facilities with a large geographical footprint, such as sports stadiums or a large logistics center.
<b>Superior Wireless Connectivity</b>	With every AP on the same channel, the Extricom switch receives multiple copies of each client transmission and chooses the best AP to transmit the reply, making the system highly resilient to RF interference and ensuring the highest possible throughput.
<b>Designed for 802.11n</b>	The 802.11n Draft 2 compliant EXSW-1600C delivers a smooth migration path to 802.11n and enables simple, practical 801.11n deployment for enterprises.
<b>Centralized Access</b>	Extricom switches coordinate media access for all of the connected APs and eliminate co-channel interference, which leads to higher performance and more stable operation under heavy load.
<b>Centralized Power</b>	The Extricom WLAN switches supply power for all the connected Extricom UltraThin APs through built-in PoE. The combined EXSW-1600/EXSW-1600C supports up to thirty-two Extricom 4-radio UltraThin APs.
<b>TrueReuse</b>	TrueReuse™, an Extricom patented technology, increases capacity by permitting simultaneous transmission on the same channel within the Channel Blanket.

\*The EXSW-1600C cannot be configured as a standalone device.



## EXSW-1600C Wireless LAN Switch Specifications

### Standards Compliance

WLAN	IEEE 802.11a/b/g/n IEEE 802.11i IEEE 802.11d
Ethernet	IEEE 802.3x, full duplex IEEE 802.1q, VLAN tagging IEEE 802.3af Power over Ethernet

### Wireless Performance

Channels	Control up to four simultaneous WLAN Channel Blankets, regardless of band
Capacity	Configurable rate for each channel 802.11b: 1 to 11 Mbps 802.11g/a: 1 to 54 Mbps 802.11n: 6 to 300 Mbps
TrueReuse	Extricom exclusive: Increase aggregate bandwidth of a Wi-Fi channel by enabling denser re-use than cell planning, without co-channel interference
Roaming	Intra-switch - 0 mSec; Inter-switch < 50 mSec

### SSID & VLAN

SSID	Up to 8 ESSIDs per (radio) channel blanket
VLANs	4096 Ethernet VLANs SSID to VLAN mapping

### Management

User Interface	Secure Web-based GUI* Command Line Interface (CLI)
SNMP	Version 2c
Redundancy	Master-to-backup auto fallback
Captive Portal	Customizable web client captive portal
Upgrades	Firmware upgrade through Web

### Security

Encryption	802.11i hardware-based encryption for: WEP-64 and WEP-128 WPA-TKIP / AES (CCMP) WPA2-TKIP / AES (CCMP)
Authentication	RADIUS (802.1x) Captive portal authentication WPA Pre-Shared Key (PSK), WPA2 EAP, TLS, TTLS, LEAP, PEAP, MD5, MAC
Security policy	MAC Address-based ACL Per ESSID/BSSID security configuration Built-in wireless intrusion detection (IDS) Captive portal walled garden Per-user dynamic VLAN assignment
Rogue AP	Built-in, dedicated dual-band scanning using one channel blanket

### Interfaces

WLAN Ports (to APs)	Thirty-two (32) Gigabit Ethernet ports** with IEEE 802.3af PoE (software enabled)
LAN Ports (Uplink to Wired LAN)	Two (2) Gigabit Ethernet RJ45/SFP Combo Ports per component switch

### Physical Properties

Installation options	Rack mount (19" 1U) and desktop	
Dimensions per component switch (W x H x D)	441 x 44 x 371mm	17.4 x 1.7 x 14.6"
Weight per component switch	3.6 kg	7.9 lbs
LEDs	Power LAN Activity Activity on AP ports	
Power	100-240V / 5A Max PoE to WLAN ports: 15W per port	

### Environmental

Operational	Temperature: 0°C to 45°C (32°F to 113°F) Humidity: 0% to 90%, non-condensing
Storage	Temperature: - 20°C to +70°C (-4°F to 158°F) Humidity: 0% to 90%, non-condensing

### Regulations Approval

Safety	UL 60950-1 EN 60950-1 IEC 60950-1
EMC	FCC Part 15 Class B EN 300386 VCCI Technical Requirements, V-3/2001.04

### Ordering Information

EXSW-1600C	16-Port Extricom GbE Wireless LAN Switch Cascade
------------	--

### Related Products

EXSW400	4-Port Extricom Wireless LAN Switch
EXSW800	8-Port Extricom Wireless LAN Switch
EXSW-1200	12-Port Extricom Wireless LAN Switch
EXSW-2400	24-Port Extricom Wireless LAN Switch
EXSW-800G	8-Port Extricom GbE Wireless LAN Switch
EXSW-1600	16-Port Extricom GbE Wireless LAN Switch
EXRP-20/40	2-Radio/4-Radio UltraThin 802.11a/b/g Access Point
EXRP-20E/40E	2-Radio/4-Radio UltraThin 802.11a/b/g Access Point with Connectors for External Antennas
EXRP-30n	3-Radio UltraThin 802.11a/b/g/n Access Point
EXRP-40En	4-Radio UltraThin 802.11a/b/g/n Access Point
EXNM-2000	Extricom Wireless Network Management System

Note: Information is subject to change without prior notice.

\* The EXSW-1600C cannot be configured in standalone mode.

\*\* Combined EXSW-1600/EXSW-1600C.