

Ubiquiti UniFi AP AC Lite Indoor Access Point



Product Name: Ubiquiti UniFi AP AC Lite Indoor Access Point

Manufacturer: Ubiquiti Networks

Model Number: UAP-AC-LITE

Please Note: The UAP-AC-LITE now includes a PoE injector. The PoE injectors do not include a UK power cable. If you require a UK cable, to go with your PoE injector, please select one using the above 'Available Product Options'.

Ubiquiti UniFi AP AC Lite Indoor Access Point - Gen2 - 802.3af/A PoE & 24V PoE
The Ubiquiti UniFi AP AC Lite delivers a cost-effective combination of value and performance in a reduced footprint, with an ultra compact design. The UAP-AC-Lite is 25% smaller than the standard UAP. The UniFi AP AC Lite provides simultaneous, dual-band and 2x2 MIMO technology.


Ubiquiti UniFi AC Lite Key Features

- 802.3af/A PoE & 24V PoE
- 2 x 2 MIMO
- Simultaneous dual-band
- 2.4GHz throughput of 300Mbps
- 5GHz throughput of 867Mbps
- Range of 122 m (400 ft)
- 1 Gigabit Ethernet Ports
- 24v / 48v compatible

The UniFi AC-Lite combines enterprise performance, unlimited scalability, and a central management controller. UniFi 802.11AC Dual-Band Radio Access Points (APs) have a refined industrial design and can be easily installed using the included mounting hardware.

Compact Form FactorThe UAP-AC-Lite has a range of 122m (400ft). The below image shows the size comparison to the standard UniFi model.

Ubiquiti UniFi AP AC Lite Indoor Access Point

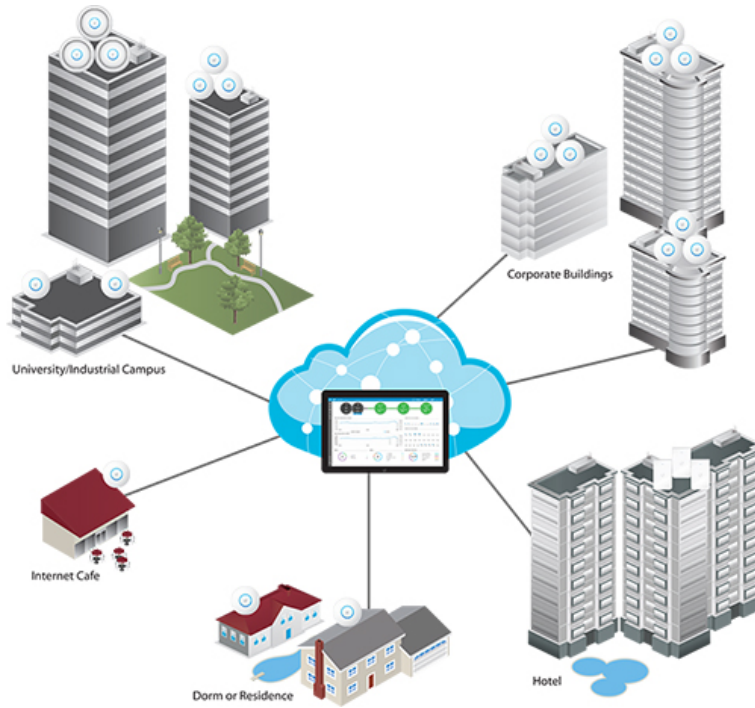

Ubiquiti UniFi AP AC Lite Indoor Access Point

Ubiquiti UniFi UAP-AC-Lite - Technical Specifications General

- Dimensions 160 x 160 x 31.45 mm (6.30 x 6.30 x 1.24")
- Weight 170 g (6.0 oz) With Mounting Kits 185 g (6.5 oz)
- 24v / 48v compatible
- Networking Interface (1) 10/100/1000 Ethernet Port
- Buttons Reset
- Antenna (2) Dual-Band Antennas, 3 dBi Each
- Wi-Fi Standards 802.3af/A PoE & 24V PoE
- Power Method Passive Power over Ethernet (24V), (Pairs 4, 5+; 7, 8 Return)
- Power Supply 24V, 0.5A Gigabit PoE Adapter*
- Maximum Power Consumption 6.5W
- Maximum TX Power 2.4 GHz 20 dBm 5 GHz 20 dBm
- BSSID Up to Four per Radio
- Power Save Supported
- Wireless Security WEP, WPA-PSK, WPA-Enterprise (WPA/WPA2, TKIP/AES)
- Certifications CE, FCC, IC
- Mounting Wall/Ceiling (Kits Included)
- Operating Temperature -10 to 70° C (14 to 158° F)
- Operating Humidity 5 to 95% Noncondensing* Only the single-pack of the UAP-AC-LITE includes a PoE adapter.

Advanced Traffic Management

- VLAN 802.1Q
- Advanced QoS Per-User Rate Limiting
- Guest Traffic Isolation Supported
- WMM Voice, Video, Best Effort, and Background
- Concurrent Clients 200+

Supported Data Rates (Mbps)

- Standard Data Rates
- 802.11a 6, 9, 12, 18, 24, 36, 48, 54 Mbps
- 802.11n 6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
- 802.11ac 6.5 Mbps to 867 Mbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80)
- 802.11b 1, 2, 5.5, 11 Mbps
- 802.11g 6, 9, 12, 18, 24, 36, 48, 54 Mbps

Price: £63.60