PEPWAVE



BR1 Pro

Here LTE gets Sonic




Wi-Fi just got better

Connect multiple devices simultaneously, and experience faster throughput speeds and better bandwidth congestion with the latest Wi-Fi 6, all with less interference.

SpeedFusion Ready

Enable the endless possibilities of SpeedFusion technology just by simply connecting to SpeedFusion Cloud from wherever you are.



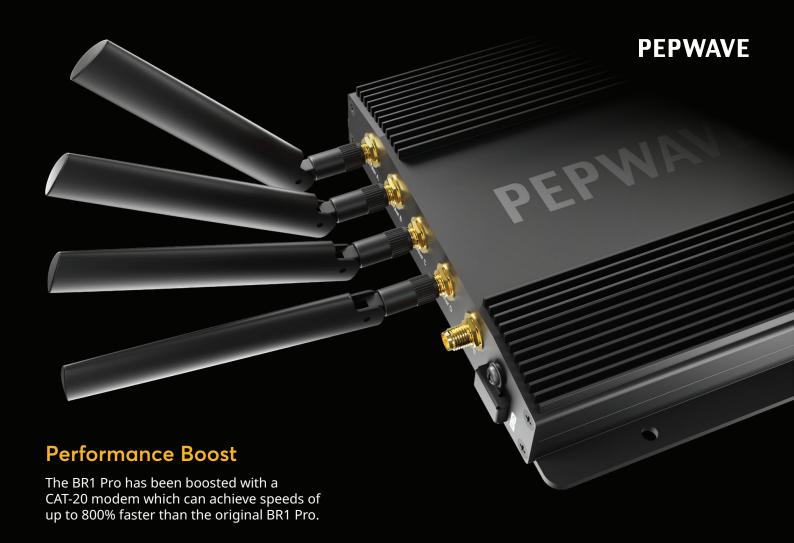




Hardcore Capabilities

The BR1 Pro comes equipped with a 2.5Gbps Ethernet port, making it compatible for your network devices to run at their designated speeds without limitations.



Deploy Anywhere

Certified toughness and wide operating temperatures mean you can just deploy, forget, and enjoy the benefits.





Specifications

WAN Interface	1x 10/100/1000/2500M Ethernet ¹ 1x LTE-A Pro Modem with Redundant SIM Slots	Antenna Connectors	4x SMA Cellular Antenna Connectors 2x RP-SMA Wi-Fi Antenna Connectors 1x SMA GPS Antenna Connector
LAN Interface	2x 10/100/1000M Ethernet	Power Input	10 - 30V
Wi-Fi Interface	Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 6, 2X2 MU-MIMO	Power Consumption	8 W (nominal), 19 W (max.)
	Wi-Fi WAN and/or AP	Dimension	5.78 x 5.08 x 1.15 inches / 146.8 x 129 x 29.3 mm
SpeedFusion features	Hot Failover, WAN Smoothing, Bandwidth Bonding ²	Weight	1.28 pounds / 0.58 kg
Number of PepVPN	2/5 ³	Operating Temperature	-40°- 149°F / -40°- 65°C
•		Humidity	15% – 95% (non-condensing)
Features	Drop-in Mode Load Balancing/Failover Ignition Sensing	Warranty	1-Year Limited Warranty
Router Throughput	1 Gbps	Certifications	FCC, CE, RoHS E-Mark (Motor Vehicle) ⁵ EN 61373 Shock and Vibration Resistance ⁵
PepVPN Throughput (No Encryption)	400 Mbps		EN 50155 Railway Applications - Electronic Equipment used on Rolling Stock
PepVPN Throughput (256-bit AES)	200 Mbps	Package Content	EN 61000 Electromagnetic Compatibility 1x MAX BR1 Pro CAT-20
Recommended Users	1-150		1x 12V2A Power Supply (ACW-632) 4x LTE/5G Antennas (ACW-234) 2x Wi-Fi Dual Band Antenna (ACW-341)
Cellular Data Rate ⁴	CAT-20: 2 Gbps / 211 Mbps		1x GPS Antenna (ACW-232)

(Downlink/Uplink)

¹ The WAN port can act as a LAN port if needed. ² Requires PrimeCare Subscription, complementary for the first year ³ 2 PepVPN Peers are enabled by default. 5 PepVPN Peers are enabled with PrimeCare Subscription, complimentary for the first year. ⁴ Theoretical maximum data rates. ⁵ Certifications Pending.

Ordering Information

Product Code

MAX-BR1-PRO-GLTE-S-T-PRM Embedded Modem(s): 1x LTE-A Pro (CAT-20) Regions

Compatibility: Global

LTE Bands

B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B18, B19, B20, B21, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71

3G Bands

HSPA+: B1, B2, B3, B4, B5, B8, B9

Featured Add-on

Product CodeDescriptionPRM-MAX-BR1-PRO-1Y1-Year PrimeCare for BR1 ProPRM-MAX-BR1-PRO-2Y2-Year PrimeCare for BR1 ProPRM-MAX-BR1-PRO-4Y4-Year PrimeCare for BR1 Pro