

SFP+ Direct Attach Cables are compliant with the SFF-8431, SFF-8432 and SFF-8472 specifications. Various choices of wire gauge are available from 30 to 24 AWG with various choices of cable length (up to 7m).

## Key Features

- Compliant with SFF-8431, 8432 and 8472.
- Up to 10.3125Gbps data rate per channel
- Up to 7m transmission
- Operating temperature: 0~70°C
- Single 3.3V power supply
- RoHS compliant
- Cost-effective copper solution
- Lowest total system power solution
- Lowest total system EMI solution
- Optimized design for Signal Integrity



## Applications

- 10G Ethernet

## Regulatory compliance

Feature	Test Method	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883C Method 3015.7	Class 1(>2000 Volts)
Electromagnetic Interference(EMI)	FCC Class B	Compliant with Standards
	CENELEC EN55022 Class B	
	CISPR22 ITE Class B	
RF Immunity(RFI)	IEC61000-4-3	Typically Show no Measurable Effect from a 10V/m Field Swept from 80 to 1000MHz
RoHS Compliance	RoHS Directive 2011/65/EU and it's Amendment Directives 6/6	RoHS 6/6 compliant

## General Product Characteristics


SFP+ DAC Specifications	
Number of Lanes	Tx & Rx
Channel Data Rate	10.3125 Gbps
Operating Temperature	0 to + 70°C
Storage Temperature	-40 to + 85°C
Supply Voltage	3.3 V nominal
Electrical Interface	20 pins edge connector
Management Interface	Serial, I <sup>2</sup> C

## High Speed Characteristics

Parameter	Symbol	Min	Typical	Max	Units	Notes
Differential Impedance	Zd	90	100	110	Ω	
Differential Input Return Loss	SDDXX	$< -12 + 2 * \text{SQRT}(f)$ with f in GHz			dB	0.01~4.1GHz
		$< -6.3 + 13 * \text{Log}_{10}(f/5.5)$ with f in GHz			dB	4.1~11.1GHz
Common Mode Output Return Loss	SCCXX	$< -7 + 1.6 * f$ with f in GHz			dB	0.01~2.5GHz
				-3	dB	2.5~11.1GHz
Difference Waveform Distortion Penalty	dWDPC			6.75	dB	
VMA Loss	L			4.4	dB	
VMA Loss to Crosstalk Ratio	VCR	32.5			dB	


## Pin Function Definition

Pin	Logic	Symbol	Description
1		VeeT	Module Transmitter Ground
2	LVTTTL-O	Tx_Fault	Module Transmitter Fault
3	LVTTTL-I	Tx_Disable	Transmitter disable; Turns off transmitter laser output
4	LVTTTL-I/O	SDA	2-wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i)
5	LVTTTL-I/O	SCL	2-wire Serial Interface Clock (Same as MOD-DEF1 in INF-8074i)
6		Mod_ABS	Module Absent, connected to VeeT or VeeR in the module
7	LVTTTL-I	RS0	Rate Select 0, optionally controls SFP+ module receiver
8	LVTTTL-O	Rx_LOS	Receiver Loss of Signal Indication (In FC designated as Rx_LOS and in Ethernet designated as Signal Detect)
9	LVTTTL-I	RS1	Rate Select 1, optionally controls SFP+ module transmitter
10		VeeR	Module Receiver Ground
11		VeeR	Module Receiver Ground
12	CML-O	RD-	Receiver Inverted Data Output
13	CML-O	RD+	Receiver Non-Inverted Data Output
14		VeeR	Module Receiver Ground
15		VccR	Module Receiver 3.3 V Supply
16		VccT	Module Transmitter 3.3 V Supply
17		VeeT	Module Transmitter Ground
18	CML-I	TD+	Transmitter Non-Inverted Data Input
19	CML-I	TD-	Transmitter Inverted Data Input
20		VeeT	Module Transmitter Ground

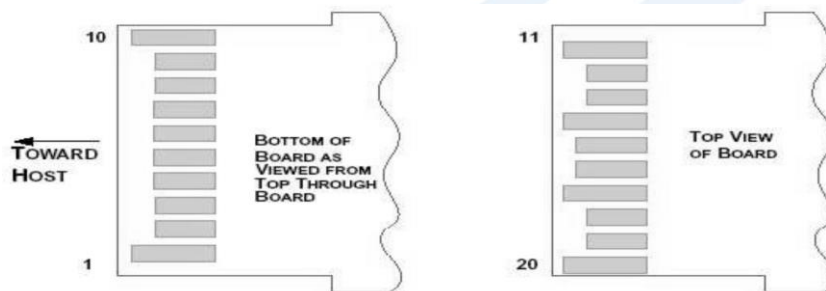

## Mechanical Specifications

The connector is compatible with the SFF-8432 specification.

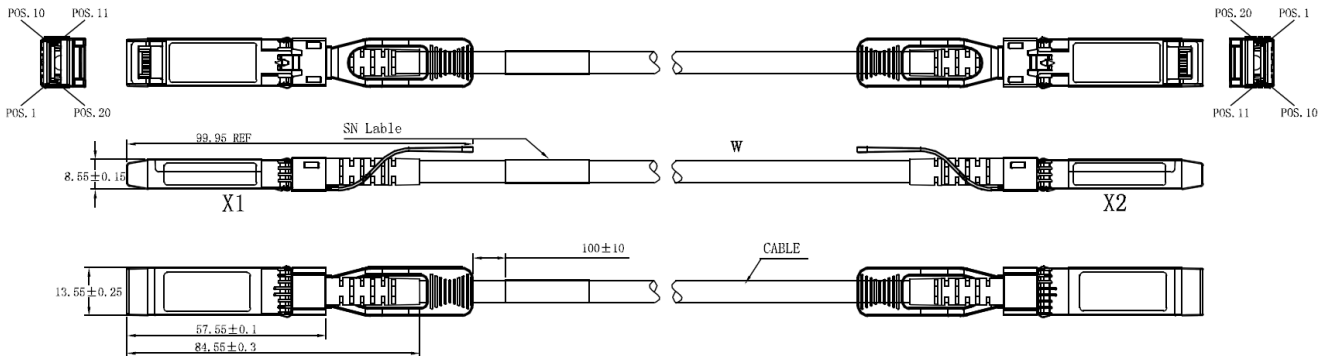

Length (m)	Cable AWG
1	30/28/24
2	30/28/24
3	30/28/24
4	24/26
5	24/26
6	24
7	24

## Ordering information

Part Number	Product Description
CHT-SFP-10G-DAC-xM	10G SFP+ Direct Attach Cables, 10.3125Gbps, up to 7m, 0°C ~ +70°C

X = length