

DATASHEET / QUSPOT FOR RUT955 / A955S

QuSpot for RUT955

INTEGRATED MULTI-BAND LTE OMNI ANTENNA + WIFI OMNI ANTENNA + GPS ANTENNA + PLACE TO INSTALL TELTONIKA RUT955 (ALL-IN-ONE)

QuSpot omni LTE antenna for Teltonika RUT955 router is a perfect outdoor device for mobile and fixed installations like industrial, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded also omni Wi-Fi and GPS antenna. If you use RUT955 with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.



OUTDOOR

ANTENNA

SOLUTION

Use Teltonika router wherever you want

Maximize your signal with QuWireless antennas

Plug Teltonika router and you are good to go



LTE SPECIFICATION

FREQUENCY	0.694-0.96 GHz
	1.7 - 2.2 GHz
	2.2 - 2.7 GHz
GAIN	2 dBi
	2 dBi
	4 dBi
VSWR	<1.70, max <2.00
	<1.60, max <2.00
	<1.60, max <2.00
BEAMWIDTH	360°/35° +/- 5°
	360°/35° +/- 5°
	360°/35° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
WI-FI SPECIFICATION FREQUENCY GAIN	2.40-2.50 GHz
	4.70 - 6.00 GHz
	6 dBi
	7 dBi
VSWR	<1.70, max <2.00
	<1.70, max <2.00
BEAMWIDTH	360°/25° +/- 5°
	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
	50.22
MECHANICAL SPECIFICATION	
MATERIALS	ABS, aluminum, PTFE
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm
	6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg
	3.31 lbs
OPERATING TEMPERATURE	From -40°C to 75°C
	From -40°F to 167°F

DEVICE SPECIFICATION

DIMENSIONS





Industrial Ethernet to 4G LTE IoT gateway. Advanced VPN functionality, security and remote management capabilities makes TRB140 the best option for single device connectivity.

RUT955 Datasheet

RUT955 User Manual

RUT955 Quick Start Guide

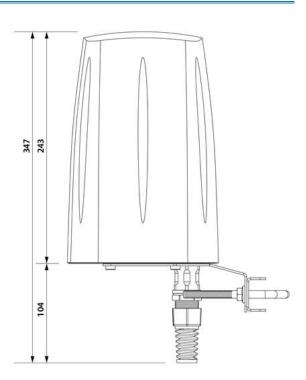



HEADQUARTER:

Wireless Instruments sp. z o.o. ul. Kościuszki 27 52-116 Iwiny POLAND <u>sales@quwireless.com</u> tel 1. +48 601 366 369 tel 2. +48 577 667 761 <u>www.quwireless.com</u>

